


Hand Operated Chain Pulley Block



Salient Features

- ❑ CE approved
- ❑ Conforms to International Standard
- ❑ Warranted for 12 months
- ❑ Minimal effort to lift
- ❑ Smooth function
- ❑ Triple spur gear
- ❑ Load chain grade 80
- ❑ Compact Size
- ❑ Safety factor 4 times
- ❑ Enclosed brake mechanism

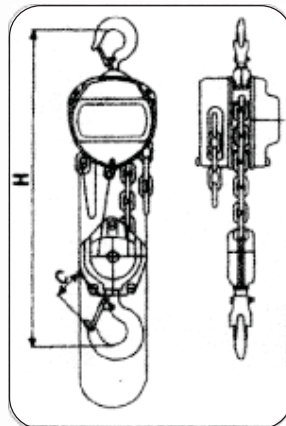

TECHNICAL PARAMETERS

CAPACITY(TONNES)	0.5	1	1.5	2	2	3	5	10	20
Model	KT 0.5	KT 1	KT 1.5	KT 2(1)	KT 2 (2)	KT 3	KT 5	KT 10	KT 20
Standard Lift (Meters)	3	3	3	3	3	3	3	3	6
Column of Load Chain	1	1	1	1	2	2	2	4	8
Load Chain Dia	6	6	8	8	6	8	10	10	10
Head Room "H" (mm)	280	306	368	444	368	520	616	700	1000
Efforts required to lift max load (N)	221	304	343	457	390	390	420	392	392
Top / Bottom Hook opening "C" (mm)	37	45	49	52	52	67	78	85	92
Net Weight (Kg)	8	11	16.5	16.7	16	23	37	69	229
Extra weight per meter (Kg)	1.7	1.7	2.3	2.3	2.5	3.7	5.3	9.6	19.4

Extra Lift & higher sizes are available on request.

Due to progressive development of products, Kepro reserve the right to alter the specifications shown within this brochure without notice.